
## **HEIDI BACK 2.0**







## **HEIDI BACK 2.0**

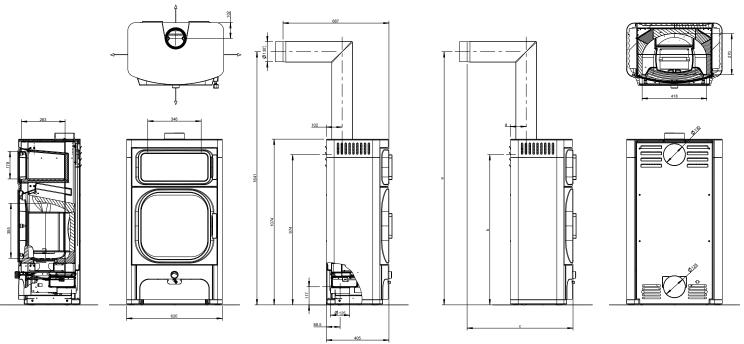

Dimensions and weight	
Height [mm]	1074
Width [mm]	620
Depth [mm]	405
Combustion chamber width [mm]	418
Combustion chamber height [mm]	355
Combustion chamber depth [mm]	270
Baking compartment width [mm]	346
Baking compartment height [mm]	178
Baking compartment depth [mm]	283
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1641
Dimensions, b (with Austroflamm elbow piece) [mm]	974
Dimensions, c (with Austroflamm elbow piece) [mm]	687
Dimensions, d (with Austroflamm elbow piece) [mm]	102
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	168
Weight Xtra [kg]	-
Weight, HMS [kg]	67
Total weight inc. steel case (STM) [kg]	168
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
dR Distance rear [mm]	50
dS1 Distance left [mm]	50
dS2 Distance right [mm]	50
dP Radiation front [mm]	1200
dF Radiation to the floor [mm]	1500
dB Distance bottom [mm]	0
dL 1 Radiation left [mm]	1500
dL 2 Radiation right [mm]	1500
dC Distance above [mm]	750
Minimum distance from non-flammable materials [mm]	50
The state of the s	
Output	
Nominal heat efficiency [kW]	7.5
Minimum heat output [kW]	-
Maximum heat output [kW]	7.5
Minimum room heating capacity [m³]	82
Maximum room heating capacity [m³]	210
Energy efficiency class	A+
Data for the chimney sweep	
Exhaust gas mass flow [g/s]	6.3
Flue gas temperature [°C]	260
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10
Equipment	
Xtra heat storage technology	-
Heat Memory System	Accessories
External air connection / operation independent of ambient air	Yes

Ash box

Ash removal