


STILA



AUSTROFLAMM

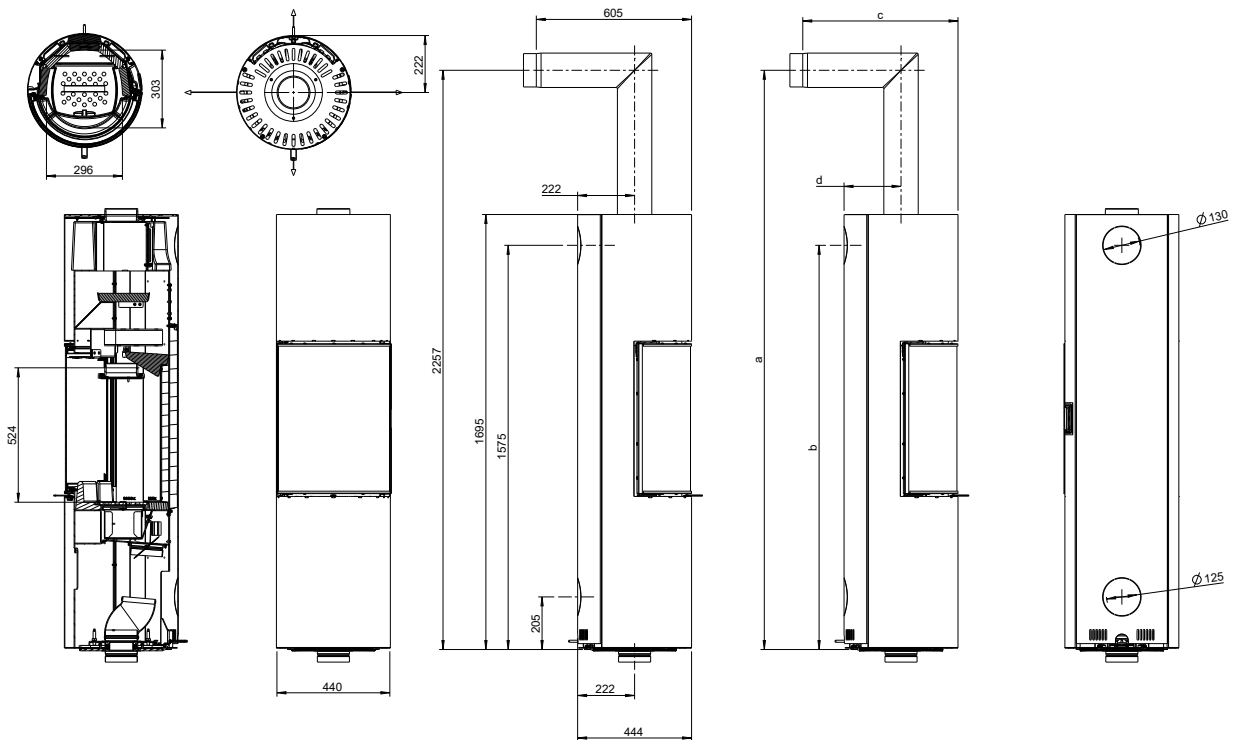

www.austroflamm.com

| Dimensions and weight | |
|--|-------------|
| Height [mm] | 1695 |
| Width [mm] | 444 |
| Depth [mm] | 444 |
| Combustion chamber width [mm] | 296 |
| Combustion chamber height [mm] | 524 |
| Combustion chamber depth [mm] | 303 |
| Baking compartment width [mm] | - |
| Baking compartment height [mm] | - |
| Baking compartment depth [mm] | - |
| Warming drawer, width [mm] | - |
| Warming compartment height [mm] | - |
| Warming drawer, depth [mm] | - |
| Dimensions, a (with Austroflamm elbow piece) [mm] | 2257 |
| Dimensions, b (with Austroflamm elbow piece) [mm] | 1575 |
| Dimensions, c (with Austroflamm elbow piece) [mm] | 605 |
| Dimensions, d (with Austroflamm elbow piece) [mm] | 222 |
| Flue pipe outlet, diameter [mm] | 130 |
| Outside air connection diameter [Ø mm] | 125 |
| Weight, basic appliance [kg] | 144 |
| Weight Xtra [kg] | - |
| Weight, HMS [kg] | 42 |
| Total weight inc. steel case (STM) [kg] | 144 |
| Total weight inc. ceramic case (KGM) [kg] | - |
| Total weight inc. soapstone case (SPM) [kg] | - |
| dP Radiation front [mm] | 1000 |
| dS1 Distance left [mm] | 610 |
| dR Distance rear [mm] | 120 |
| dS2 Distance right [mm] | 610 |
| dB Distance bottom [mm] | 0 |
| Minimum distance from non-flammable materials [mm] | 50 |
| Output | |
| Nominal heat efficiency [kW] | 5.0 |
| Minimum heat output [kW] | 2.5 |
| Maximum heat output [kW] | 7.0 |
| Minimum room heating capacity [m³] | 48 |
| Maximum room heating capacity [m³] | 124 |
| Energy efficiency class | A+ |
| Data for the chimney sweep | |
| Exhaust gas mass flow [g/s] | 4.09 |
| Flue gas temperature [°C] | 311 |
| Minimum delivery pressure at nominal heat output [Pa] | 12 |
| at 0.8 times nominal heat output [Pa] | 10 |
| Equipment | |
| Xtra heat storage technology | - |
| Heat Memory System | Accessories |
| External air connection / operation independent of ambient air | Yes |
| Ash removal | Ash box |

- not available